


### 9. INSTALL REAR SEAT BACK TRAY

- (a) Engage the 2 claws and install the sub seat back tray.
- (b) Tighten the screw.

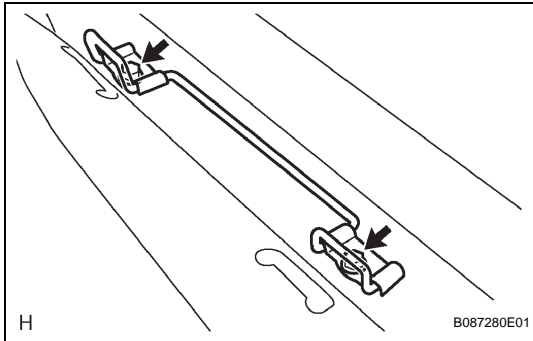


## INSTALLATION

### 1. INSTALL CHILD RESTRAINT SEAT ANCHOR BRACKET SUB-ASSEMBLY

- (a) Install the child restraint seat anchor bracket with the 2 bolts.

**Torque: 18 N\*m (185 kgf\*cm, 13 ft.\*lbf)**

- (b) Close the floor carpet.

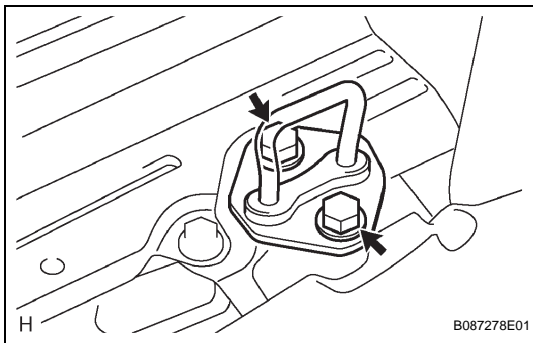


### 2. INSTALL REAR SEAT BACK LOCK STRIKER SUB-ASSEMBLY

- (a) Install the rear seat back lock striker with the 2 bolts.

**Torque: 18 N\*m (185 kgf\*cm, 13 ft.\*lbf)**

- (b) Close the floor carpet.

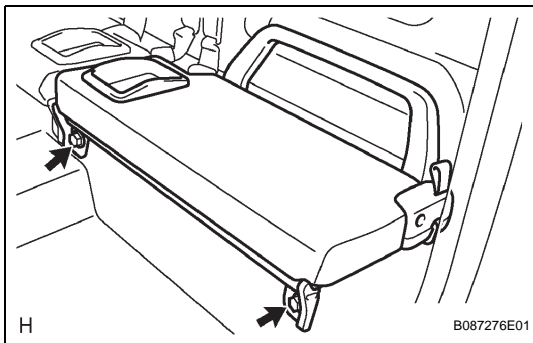

### 3. INSTALL REAR SEAT ASSEMBLY

- (a) Install the rear seat with the 2 bolts.

**Torque: 18 N\*m (185 kgf\*cm, 13 ft.\*lbf)**